


Fork Terminals

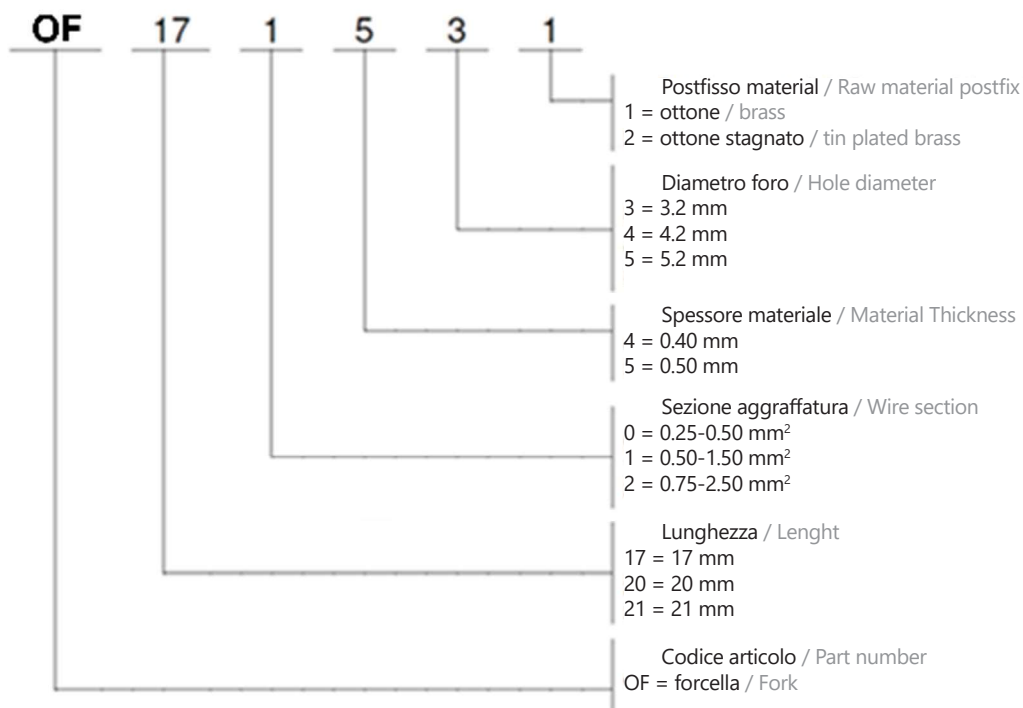

Fork Terminals

Cavi applicabili 0.50-2.50mm²
Applicable wires AWG 20-14

IDENTIFICAZIONE / Name and Part Number

CARATTERISTICHE MATERIALI / Materials Specification

Ottone e Ottone stagnato / Brass with tin plating (Lead-Free)

CORRENTI E CAVI APPLICABILI / Ratings and Applicable Wires

Sezioni di cavo applicabili / Applicable wire





0,50-2,50 mm² / 20-14 AWG

(DIN 46249 Teil1)

AUTOCERTIFICAZIONI / Product Certification

CE **RoHS** **REACH**

FORCELLA / Fork terminals

DESCRIZIONE Description	PASSO Pitch	FORO Hole	CODICE Code	Sezione/wire section		MATERIALE Material	TRATTAMENTO Treatment	CONF.NE Package
				mm ²	AWG			
	20.0mm	3,2 mm	OF171531	0,50-1,50	20-16	Ottone-Brass	---	3 x 5.000
		3,2 mm	OF171532			Ottone-Brass	Stagnato /Tin plated	3 x 5.000
		4,2 mm	OF171541			Ottone-Brass	---	3 x 5.000
		4,2 mm	OF171542			Ottone-Brass	Stagnato /Tin plated	3 x 5.000
		5,2 mm	OF171551			Ottone-Brass	---	3 x 5.000
		5,2 mm	OF171552			Ottone-Brass	Stagnato /Tin plated	3 x 5.000
	20.0mm	3,2 mm	OF172531	0,75-2,50	18-14	Ottone-Brass	---	3 x 5.000
		3,2 mm	OF172532			Ottone-Brass	Stagnato /Tin plated	3 x 5.000
		4,2 mm	OF172541			Ottone-Brass	---	3 x 5.000
		4,2 mm	OF172542			Ottone-Brass	Stagnato /Tin plated	3 x 5.000
		5,2 mm	OF172551			Ottone-Brass	---	3 x 5.000
		5,2 mm	OF172552			Ottone-Brass	Stagnato /Tin plated	3 x 5.000
Forcella con larghezza ridotta								
	21,6mm	4,2 mm	OF172541R	0,75-2,50	18-14	Ottone-Brass	---	3 x 5.000
		4,2 mm	OF172542R	0,75-2,50	18-14	Ottone-Brass	Stagnato /Tin plated	3 x 5.000
	21,6mm	4,2 mm	OF174641R	2,5+2,50	14+14	Ottone-Brass	---	3 x 5.000
		4,2 mm	OF174642R	2,5+2,50	14+14	Ottone-Brass	Stagnato /Tin plated	3 x 5.000